

TOPCON Bifacial Module With Dual Glass

GK-1-72HTBD | 144cells


570-600W | TOPCon | Half-cut

Module Efficiency up to 23.2%

15 Years Product Warranty
30 Years Linear Power Warranty



IEC 61215(2021) / IEC 61730(2023)
ISO 9001: 2015: ISO Quality Management System
Anti-PID / Ammonia / Salt-mist / Dust and sand

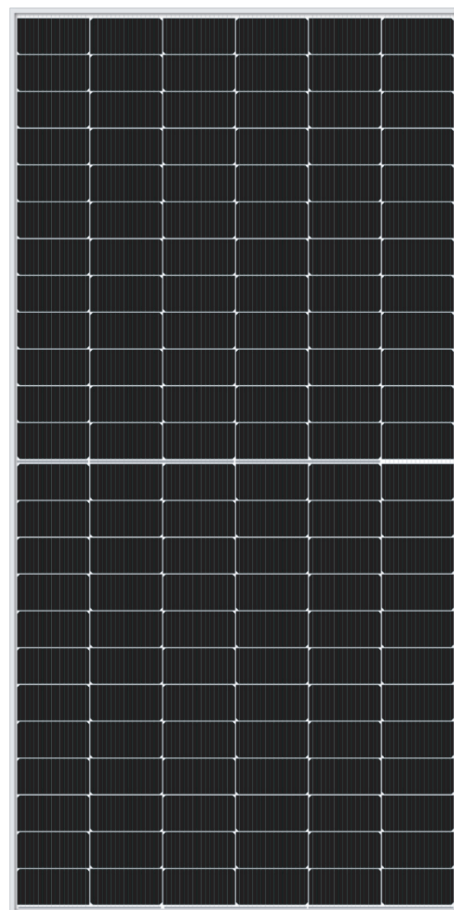

High Efficiency

Module efficiency up to 23.2% based on N-Type wafer and TOPCon technology



Quality Guarantee

High module quality ensures long-term reliability



Anti-degradation

Unsusceptible to LID, LeTID and less annual degradation due to special characteristics of N-Type



Excellent Energy Yield


More power output in field operation due to better thermal behaviors, weak-light performance and bifaciality

LINEAR PERFORMANCE WARRANTY

1% First Year Degradation

0.4% Annual Power Degradation

At least 99% of nominal power during first year;
Thereafter max.0.4% degradation per year;
At least 87.4% of nominal power up to 30 years.

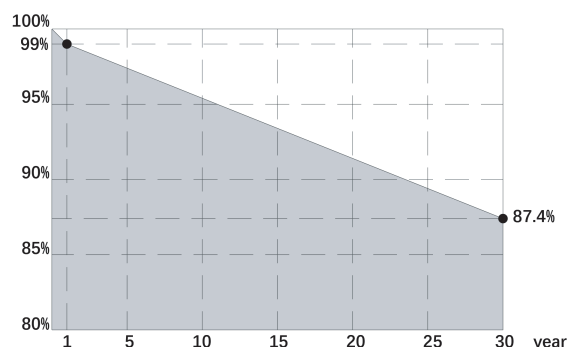

Gokin Solar Co., Ltd.


Office 1102, No. 58 Huajin Street, Hengqin Free Trade Zone, Zhuhai City, Guangdong Province
PEOPLE'S REPUBLIC OF CHINA

- Operating Temperature-40°C ~ +85°C
 - Power Tolerance0~+5W
 - Junction BoxIP68
 - NOCT45±2°C
- Maximum Series Fuse Rating30A
 - Bifacial Factor80±5%
 - Maximum System Voltage1500V(IEC)


Mechanical Parameters

Cell Type	TOPCon
No. of cells	144 (2×72)
Output Cables	TüV 1×4mm ²
	(+)300mm,(-)200mm in length or customized length
Glass	Front: 2.0mm, AR-coating, semi-tempered
	Rear: 2.0mm, semi-tempered
Frame	Anodized aluminum alloy frame
Weight	31.0 kg (68.34 lbs)
Dimension	2278×1134×30mm
Packaging	36 pcs per pallet
	Package size(mm): 2310×1125×1259
Packaging	144 pcs per 20' HC, 720 pcs per 40' HC
Protection Class	Class II

Electrical Performance

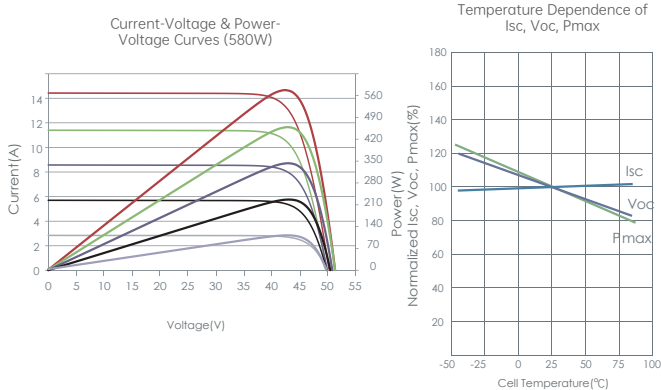

Engineering Drawings

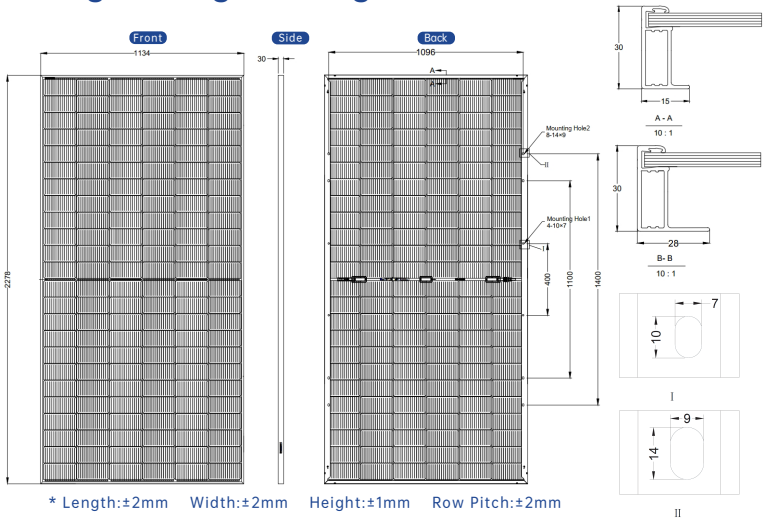

Electrical Characteristics (STC Test)

Module Type	GK-1-72HTBD-570M		GK-1-72HTBD-575M		GK-1-72HTBD-580M		GK-1-72HTBD-585M		GK-1-72HTBD-590M		GK-1-72HTBD-595M		GK-1-72HTBD-600M	
Testing Condition	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power (Pmax/W)	570	430	575	434	580	438	585	442	590	446	595	450	600	454
Open-circuit Voltage (Voc/V)	51.07	48.35	51.27	48.56	51.47	48.73	51.67	48.92	51.87	49.12	52.07	49.26	52.27	49.44
Short-circuit Current (Isc/A)	14.25	11.49	14.31	11.54	14.37	11.59	14.43	11.64	14.49	11.69	14.55	11.74	14.61	11.79
Maximum Power Voltage (Vmp/V)	42.29	40.01	42.44	40.14	42.59	40.30	42.74	40.45	42.89	40.58	43.04	40.72	43.19	40.86
Maximum Power Current (Imp/A)	13.48	10.75	13.55	10.81	13.62	10.87	13.69	10.93	13.76	10.99	13.83	11.06	13.90	11.12
Module Efficiency (%)	22.1		22.3		22.5		22.6		22.8		23.0		23.2	

1. STC: Irradiance 1000W/M², Cell Temperature25°C, AM=1.5
2. NOCT: Irradiance 800W/M², Ambient Temperature 20°C, AM=1.5, Wind Speed 1M/S

Different Rearside Power Gain (Reference to 585W)

Rearside Power Gain	5%	10%	20%
Maximum Power at STC (Pmax)	614.3	643.5	702.0
Open-circuit Voltage (Voc/V)	51.7	51.7	51.7
Short-circuit Current (Isc/A)	15.2	15.9	17.3
Maximum Power Voltage (Vmp/V)	42.7	42.7	42.7
Maximum Power Current (Imp/A)	14.4	15.1	16.4
Module Efficiency (%)	23.8	24.9	27.2

Temperature Ratings (STC)

Temperature coefficient of Isc	+0.045%/°C
Temperature coefficient of Voc	-0.25%/°C
Temperature coefficient of Pmax	-0.29%/°C

Mechanical Loading

Front Side Maximum Static Loading	5400Pa
Rear Side Maximum Static Loading	2400Pa
Hailstone Test	25mm hailstone at 23m/s

*The specifications contained in this datasheet may deviate slightly from our actual products due to the on-going innovation and product enhancement. Gokin Solar Co., Ltd. reserves the right to make necessary adjustment to the information described herein at any time without further notice.